


E-5-5 PANEL

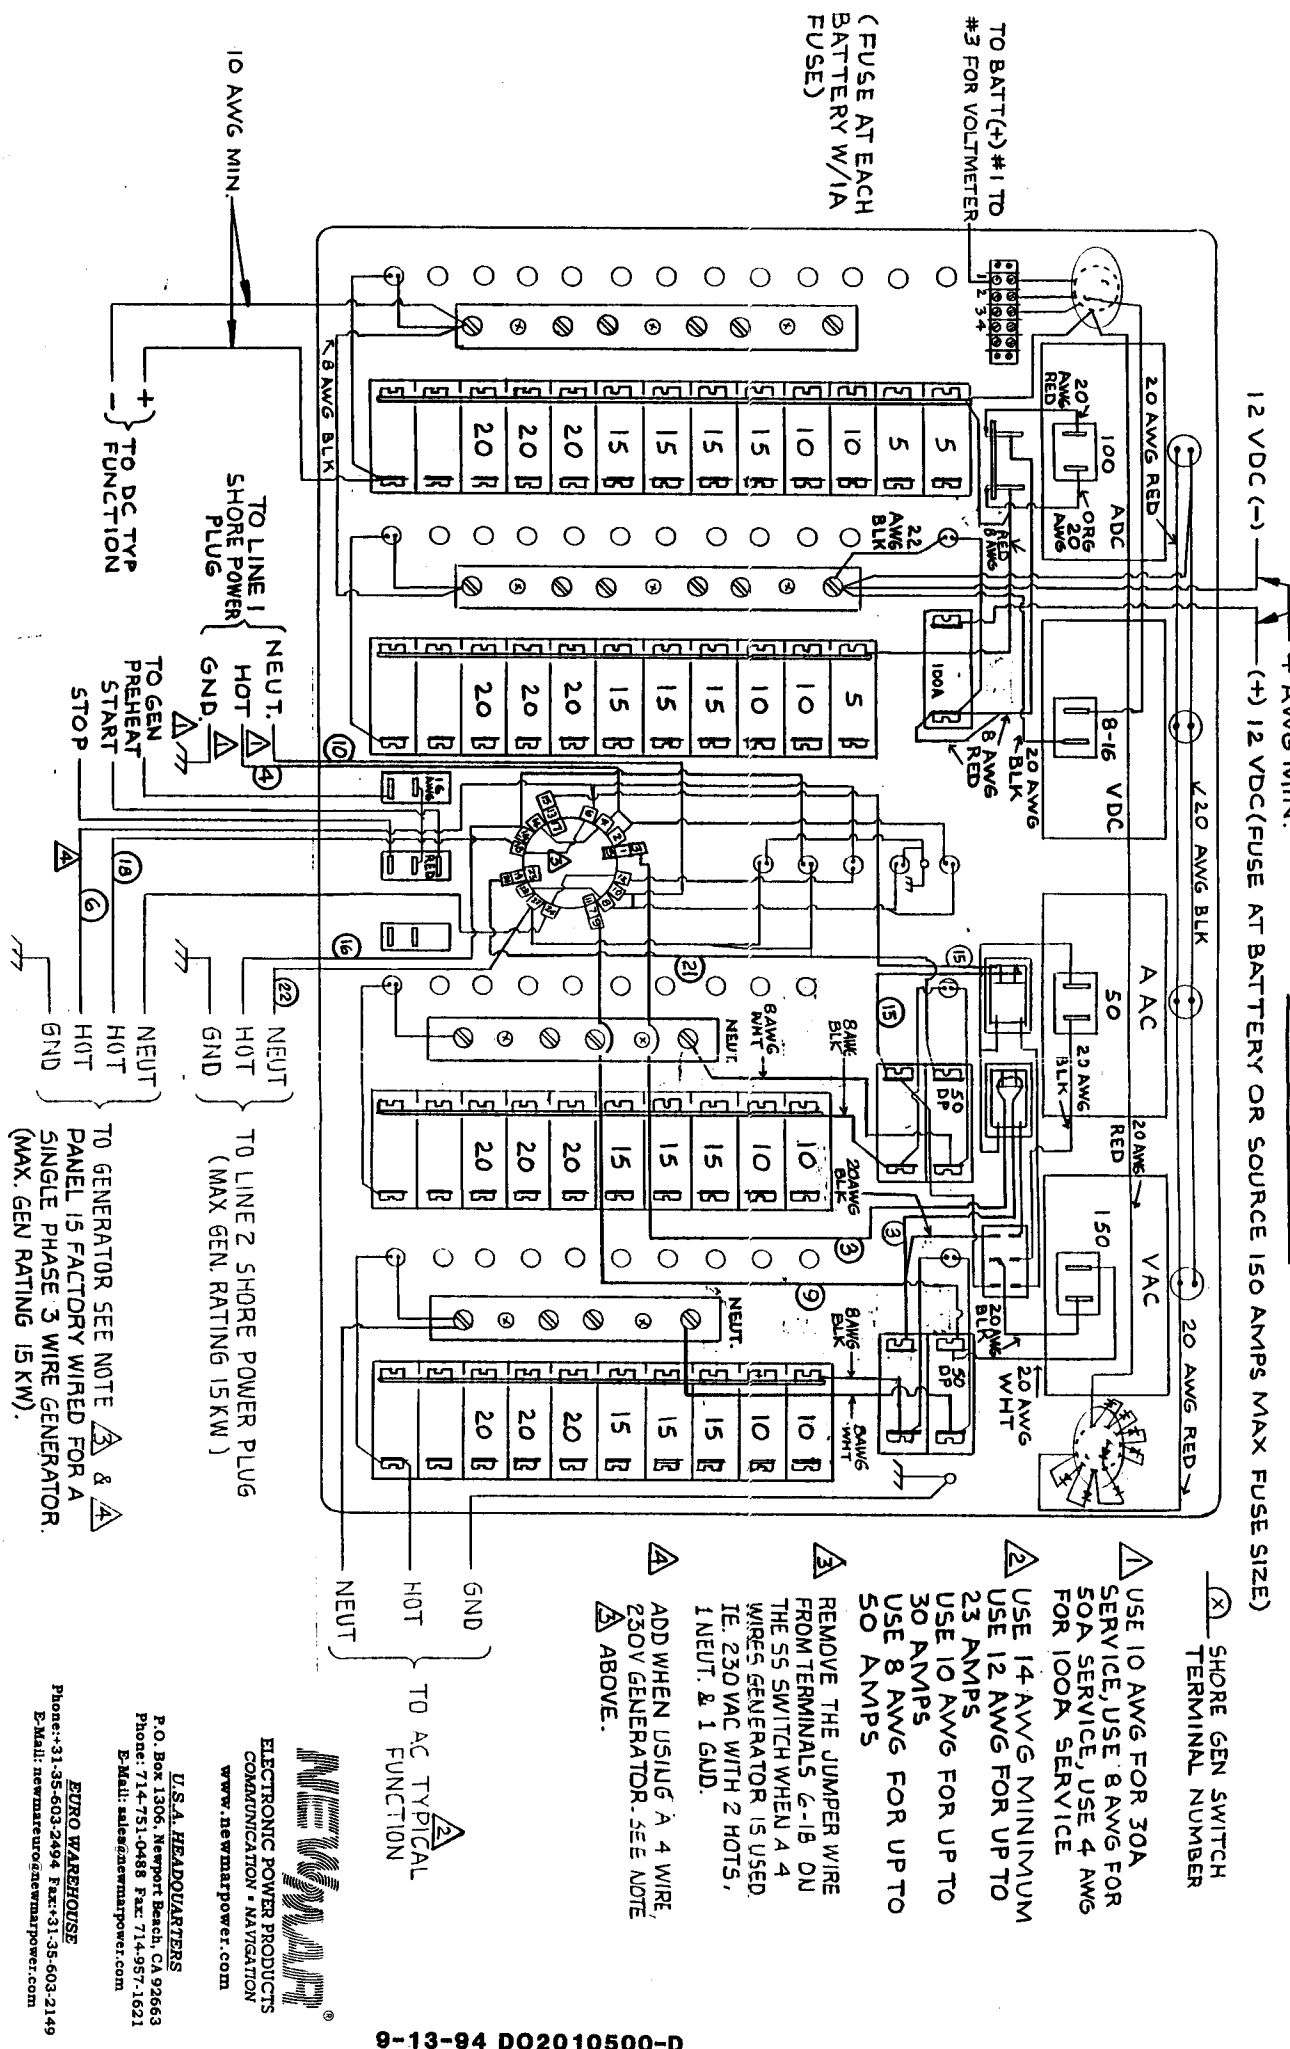

TO LINE 1 SHORE POWER PLUG
NEUT.
HOT
GND

TO GEN. PREHENT START STOP

TO LINE 2 SHORE POWER PLUG
(MAX GEN. RATING 15 KW)

TO AC TYPICAL FUNCTION

TO GEN. START STOP

TO GENERATOR SEE NOTE & PANEL IS FACTORY WIRING FOR A SINGLE PHASE 3 WIRE GENERATOR. (MAX. GEN RATING 15 KW).

⊗ SHORE GEN SWITCH
TERMINAL NUMBER

- ⚠ USE 10 AWG FOR 30A SERVICE, USE 8 AWG FOR 50A SERVICE, USE 4 AWG FOR 100A SERVICE
- ⚠ USE 14 AWG MINIMUM USE 12 AWG FOR UP TO 23 AMPS
- ⚠ USE 10 AWG FOR UP TO 30 AMPS
- ⚠ USE 8 AWG FOR UP TO 50 AMPS
- ⚠ REMOVE THE JUMPER WIRE FROM TERMINALS 6-18 ON THE 55 SWITCH WHEN A 4 WIRE GENERATOR IS USED. IE. 230 VAC WITH 2 HOTS, 1 NEUT. & 1 GND.
- ⚠ ADD WHEN USING A 4 WIRE, 230V GENERATOR. SEE NOTE ABOVE.

NEWMAR
ELECTRONIC POWER PRODUCTS
COMMUNICATION - NAVIGATION
www.newmarpower.com

U.S.A. HEADQUARTERS
P.O. Box 1306, Newport Beach, CA 92663
Phone: 714-751-0488 Fax: 714-957-1621
E-Mail: sales@newmarpower.com

EURO WAREHOUSE
Phone: +31-35-603-2494 Fax: +31-35-603-2149
E-Mail: newmar@newmarpower.com